

KODIAK®

		TWO AUGERS			
		KODIAK 25/2	KODIAK 30/2	KODIAK 35/2	KODIAK 40/2
Capacity	m³	25	30	35	40
	ft³	882	1059	1236	1412
Quantity of augers		2	2	2	2
Length	mm	8000	8100	8200	8800
	ft	26' 3"	26' 7"	26' 11"	28' 10"
Width max.	mm	2500	2500	2800	2800
	ft	9' 0,2"	9' 0,2"	10' 2"	10' 2"
Height	mm	2850	3100	3400	3450
	ft	9' 4"	10' 2"	10' 4"	10' 10"
Quantity of wheels		8	8	8	8
Wheel size		215/75-17.5 (twin)	215/75-17.5 (twin)	215/75-17.5 (twin)	215/75-17.5 (twin)
Wheel track	mm	1700	1700	2000	2000
	ft	8' 2"	8' 2"	8' 6"	8' 6"
Required power	HP	130	150	150	180
PTO revs	rpm	1000	1000	1000	1000
Weight	Kg	9500	10000	10500	12000
	lbs	20940	22050	23150	26450

		THREE AUGERS		
		KODIAK 40/3	KODIAK 45/3	KODIAK 48/3
Capacity	m³	40	45	48
	ft³	1413	1590	1695
Number of augers		3	3	3
Length	mm	11200	11500	12000
	ft	36' 9"	37' 9"	39' 4"
Width max	mm	2500	2500	2500
	ft	9' 0,2"	9' 0,2"	9' 0,2"
Height	mm	3000	3400	3600
	ft	10' 2"	10' 12"	11' 4"
Type of axles		BOGIE TRIDEM	BOGIE TRIDEM	BOGIE TRIDEM
Leaf spring suspension axles		Standard	Standard	Standard
Wheel size		215/75-17.5 (twin)	215/75-17.5 (twin)	215/75-17.5 (
Wheel track	mm	2450	2450	2450
	ft	8' 2"	8' 2"	8' 2"
Number of wheels		6	6	6
Required power	HP	180	200	220
PTO revs	rpm	1000	1000	1000
Weight	Kg	13500	15000	16000
	lbs	29760	33070	35270



KODIAK
Vertical trailed mixer feeders




+39 0377 430 405
sgariboldi.it
info@sgariboldi.it
Sgariboldi
SgariboldiOfficial

+39 0377 430 415
marketing@sgariboldi.it
sgariboldi.official
SGARIBOLDI Srl



www.sgariboldi.it

SGARIBOLDI
INNOVATION, PERFORMANCE, PEOPLE

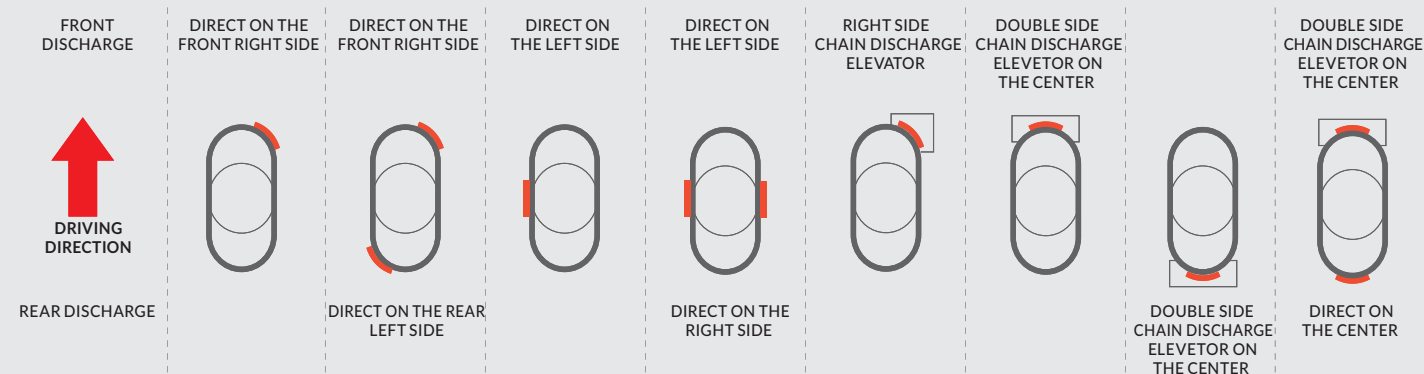

VS2 VERTICAL TECHNOLOGY


Compact vertical trailed pull type mixer feeders designed for a fast and efficient breakdown of any variety of foodstuffs, from small to larger square bales, more difficult to handle round bales of any size, shape and weight suitable for any TMR requirements.

QUICK AND EFFICIENT CUTTING

- Special auger with continuous spiral screws
- Special toothed blades
- Extra thick tub walls and bottom

Counter-knives in the mixing tank:
they ensure clean cut
of fibrous products

Uniform and
precise ration
discharge

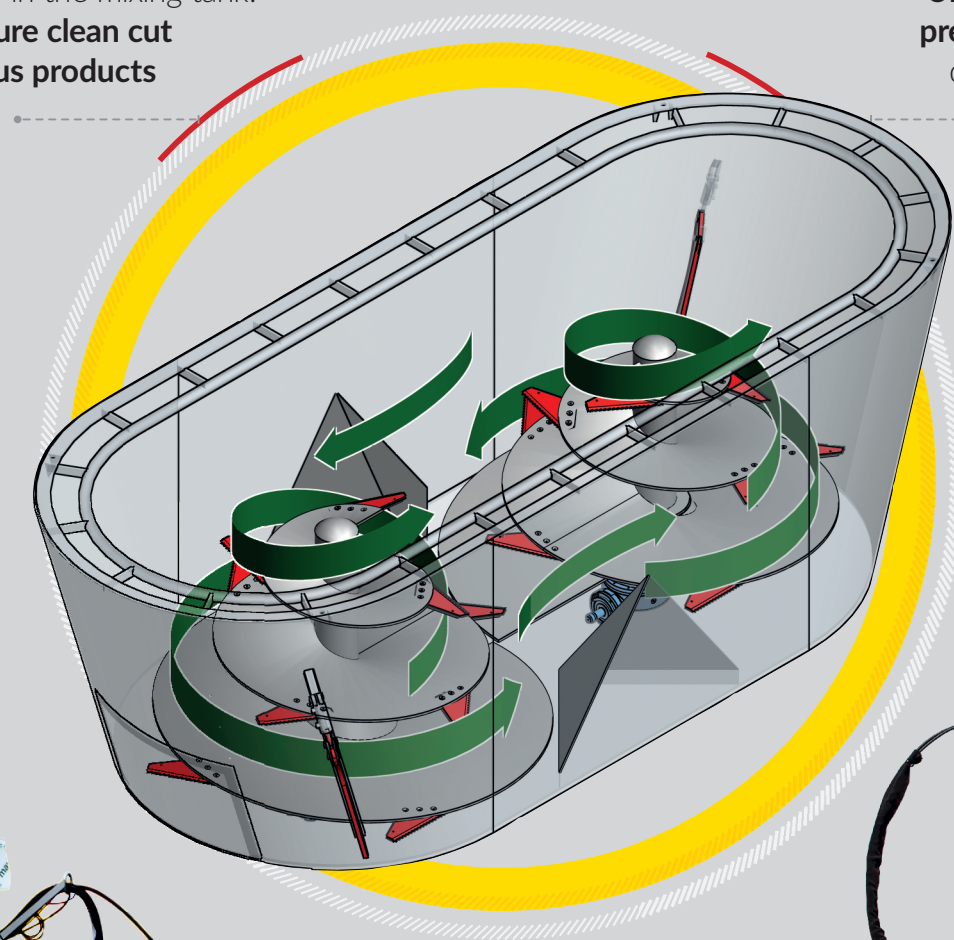

ROBUST AND FUNCTIONAL TUB

- Highly resistant, stainless steel square cells for the weighing system
- Optional STAINLESS-STEEL covers and SPECIAL STEEL SET
- The shape of the extremely strong mixing tub helps the materials flow to quickly obtain the best mixing quality, preserving the structure of the loaded ingredients as well
- The conical auger, together with special knives, allows:
 - Cutting of long fiber products
 - Reduced working times to avoid overheating in the mix
 - The retention of an excellent fodder value and excellent ration softness



01
Comer 3-speed Powership transmission
which provides a 30% fuel saving

02
Rotating magnet on the discharge elevator

03
Pneumatic brakes

04
Hopper for concentrates

